


10 HA-PT Easy Loader Series 10 Ton Tag - (2) 10K ABS Air Brake Axles

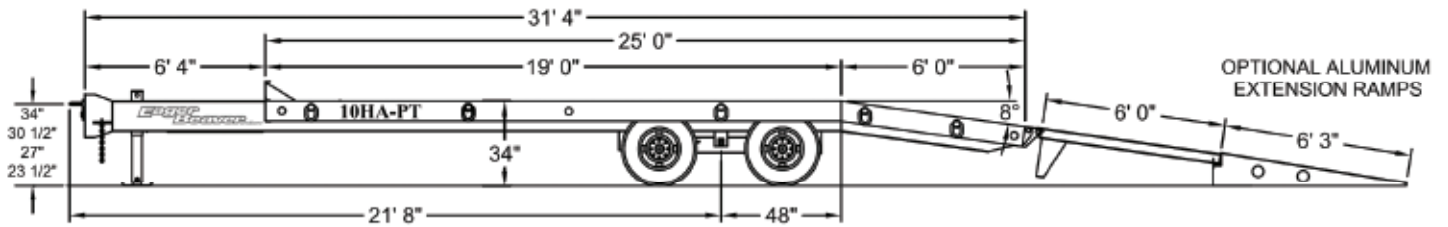

Capacity: 20,000 lbs. Trailer Weight: 5,880 lbs.
Deck Width: 8 ft. 6 in. Length: 19 ft. Height: 34 in.
Hi Tensile V-50 Steel Mainframe
Pierced Crossmembers
Cold-Formed Drawbar & Nose Plate

Heavy Duty Jack
Drawbar Storage Area
8° Beaver Tail (Safe Low Loading Angle)
Patented "ROTO RINGS"® Swivel 360°
100% Sealed Modular Wiring Harness

SPECIFICATIONS

Frame	Mainrails: W12" x 16 lbs. wide flange I-Beam, one piece cold formed Hi-tensile 50,000 P.S.I. steel mainrails from front to drawbar to rear of trailer
Crossmembers	6" x 3.7 lbs. per ft. I-Beam pierced through mainbeam
Decking	Nominal 2" Hardwood
Headboard	8" high, full width of trailer Drawbar Storage Area
Lights	12 volt, DOT approved
Wiring Harness	USA Star PLUS Sealed Modular Wiring Harness w/ 7-Way ATA Plug
Hitch	One piece solid cast steel (adjustable) lunette eye & flange mount
Safety Chains	Two 3/8" Blue-Krome plated high test, safety hook w/ latch
Parking Jack	12,000 lbs. static / 10,000 lbs. lift (Heavy Duty drop leg screw type)
Tie Down	Five per side - Patented "ROTO RINGS"® Swivel 360°
Colors	Yellow (Standard), Red, Black w/ matching RPC Undercoating

RUNNING GEAR

Tires	Eight 235/85R16 (E) Steel Belted Radial
Hubs/Wheels	Four 8 Stud on 6 1/2" BC (2 pc hub & drum), Eight 6.00 x 16 Disc Type Wheels, Oil seals
Suspension	3" wide rubber bushed Slipper Spring w/ equalizer, capacity 20,000 lbs. tandem (Adj. Alignment)
Axles	Two Heavy Duty Dexter, 10,000 lbs. each, Inner Bearing Size 2.625", Outer Bearing Size 2.250"
Brakes	Dexter 12 1/4" x 4" Air, "S" Cam, Auto Slack Adjusters
ALL WHEEL ABS	Anti-lock brake system 4S2M, Sensors All Wheels, Two modulator valves
Parking Brake	Spring Brakes on All Wheels

OPTIONS

- Additional Deck Length & Width (20'-21'-22'-23'-24' Optional Lengths) (102" Optional Width)
- Additional "ROTO-RINGS"®
- Tool Box Lid (Lockable) Optional: Expanded Metal Tray Plate
- Spare Tire & Rim 235/85R16 (E) Optional: Spare Tire Carrier
- Traction 2" x 2" Angle 6" C/C Wheel Paths Optional: Traction Center Section, Bucket Pocket or Plate
- Ramps Wood (standard) Ladder (Optional N/C)
- Extension Ramps T-6 Alum. 22" x 75" 8° angle (SET)
- Parking Jack Optional: 2-Speed Jack Optional: Jack mounted on Headboard Optional: 2-Speed Landing Gear is Available
- Apitong Decking in lieu of Oak
- Paint (other than standard Yellow) Price on Request

Call (800) 257-8163 for more information

