


25 GLB-L 25 Ton Fixed Gooseneck - B.T. & Ramps - ABS Air Brake Axles

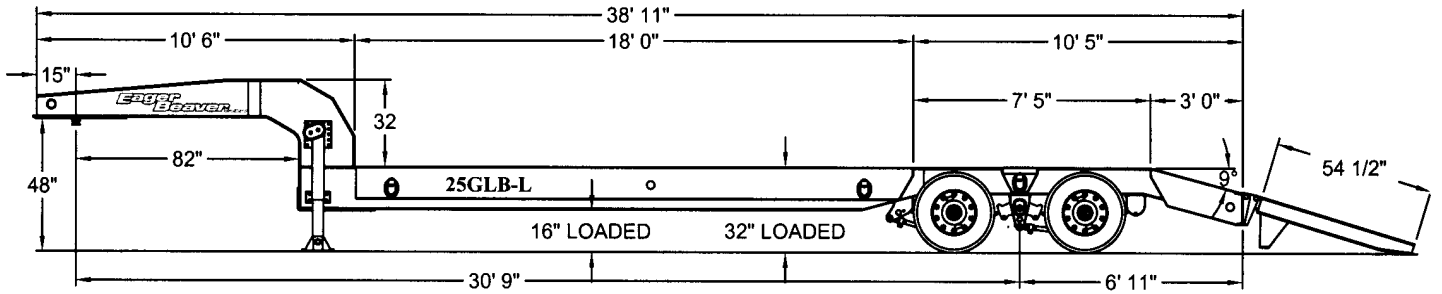

Capacity: 50,000 lbs. Trailer Weight: 9,400 lbs.
Deck Width: 8 ft. 6 in. Length: 18 ft. Height: 32 in. (Loaded)
Overall Length: 38 ft. 11 in.
Suspension: Hutch H-9700, 3 Leaf, Capacity 50,000 lbs. Tandem

Hi Tensile V-50 Steel Mainframe
Pierced Crossmembers
Patented "ROTO RINGS"® Swivel 360°
100% Sealed Modular Wiring Harness

SPECIFICATIONS

Frame	(2) 16" Fabricated I-Beam, 80,000 psi Steel
Crossmembers	10" x 9 lbs. per ft. I-Beam, pierced through mainbeam
Decking	Nominal 2" Hardwood
Wiring Harness	Sealed L.E.D. Lights & USA Star PLUS Sealed Modular Wiring Harness w/ 7-Way ATA Plug
Parking Jack	(2) Two-Speed Landing Gear
Tie Down	Three per side - Patented "ROTO RINGS"® Swivel 360°
Colors	Yellow (Standard), Red, Black w/ matching RPC Undercoating

RUNNING GEAR

Tires	Eight 215/75R17.5 (H) Michelin Steel Belted Radial
Hubs/Wheels	Four Disc Type Hubs, Eight 6.75 x 17.5, 8-Bolt, Hub-Piloted Disc Wheels
Suspension	Hutch H-9700, Three leaf, capacity 50,000 lbs. tandem
Axles	Two 5" diameter 20,000 lbs. each, H.M. series bearings (maximum axle track width)
Brakes	Dana 12 1/4" x 7 1/2" Air, "S" Cam., Auto Slack Adjusters
ALL WHEEL ABS	Anti-lock brake system 4S2M, Sensors on All Wheels, Two modulator valves
Parking Brake	Spring Brakes on All Wheels

OPTIONS

Additional Deck Length & Width: (19'-20'-21'-22'-23'-24'-25' Optional Lengths) (96" Optional Width)
 Gooseneck Length: (82", 86", 90", 94", 98" and 102" available as Std.) (For special lengths contact sales)
 Gooseneck Fenders
 Motor Grader-Ramps
 Full Width Gooseneck
 Additional "ROTO-RINGS"®
 Spare Tire & Rim 215/75R17.5 (H) Optional: Spare Tire Carrier
 Wheel Covers (Raised)
 Ramps: Wood (Standard) Ladder (Optional N/C)
 Apitong Decking in lieu of Oak
 Paint (other than standard Yellow) Price on Request