


# 35 GLB 35 Ton Fixed Gooseneck - B.T. & Ramps - ABS Air Brake Axles

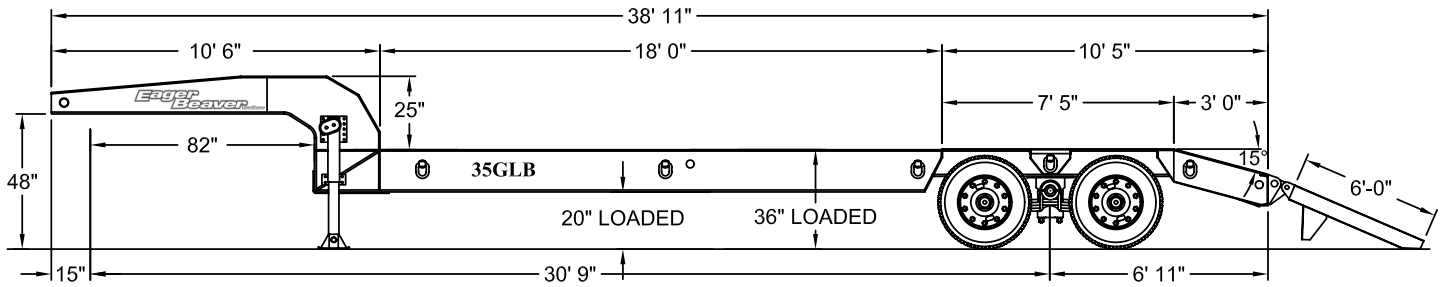

**Capacity: 70,000 lbs. Trailer Weight: 13,900 lbs.**  
**Deck Width: 8 ft. 6 in. Length: 18 ft. Height: 38 in. (Loaded)**  
**Overall Length: 38 ft. 11 in.**  
**Suspension: Hutch H-900-50 Single Point**

**Hi Tensile V-50 Steel Mainframe**  
**Pierced Crossmembers**  
**Patented "ROTO RINGS"® Swivel 360°**  
**100% Sealed Modular Wiring Harness**

## SPECIFICATIONS

Frame	(4) 16" Fabricated I-Beam, 80,000 psi Steel
Crossmembers	10" x 9 lbs. per ft. I-Beam, pierced through mainbeam
Decking	Nominal 2" Hardwood
Wiring Harness	Sealed L.E.D. Lights & USA Star PLUS Sealed Modular Wiring Harness w/ 7-Way ATA Plug
Parking Jack	(2) Two-Speed Landing Gear
Tie Down	Five per side - Patented "ROTO RINGS"® Swivel 360°
Colors	Yellow (Standard), Red, Black w/ matching RPC Undercoating

## RUNNING GEAR

Tires	Eight 255/70R22.5 (H) Michelin Steel Belted Radial
Hubs/Wheels	Four Disc Type Hubs, Eight 8.25 x 22.5 Disc Type Wheels, Stemco Oil Seals, Hub Piloted
Suspension	Hutch H-900-50 Single Point 50,000 lbs. capacity tandem
Axles	Two 5" diameter 25,000 lbs. each, H.M. series bearings
Brakes	16 1/2" x 7" Air, "S" Cam., Auto Slack Adjusters
ALL WHEEL ABS	Anti-lock brake system 4S2M, Sensors on All Wheels, Two modulator valves
Parking Brake	Spring Brakes on All Wheels

## OPTIONS

Additional Deck Length & Width: (19'-20'-21'-22'-23'-24'-25' Optional Lengths) (96" Optional Width)  
 Gooseneck Length: (82", 86", 90", 94", 98" and 102" available as Std.) (For special lengths contact sales)  
 Gooseneck Fenders  
 Motor Grader-Ramps  
 Full Width Gooseneck  
 Additional "ROTO-RINGS"®  
 Spare Tire & Disc Wheel 255/70R22.5 (H) Optional: Spare Tire Carrier  
 Low Profile: 33" Loaded Deck Height, 265/70R19.5 Tires and 7.5 x 19.5 Disc Type Wheels (15 x 8 5/8 Brakes)  
 Wheel Covers (Flush)  
 Ramps: Wood (Standard) Ladder (Optional N/C)  
 Apitong Decking in lieu of Oak  
 Paint (other than standard Yellow) Price on Request