


B9 DOW 9 Ton Tag - (3) 6K Electric Brake Axles

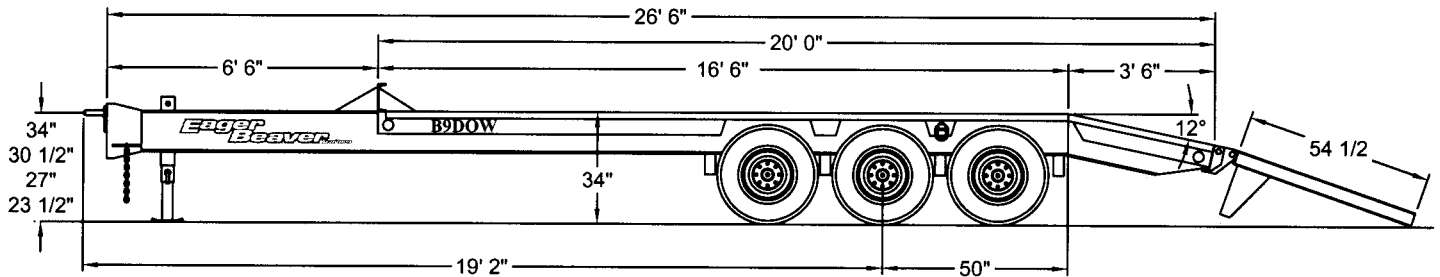

Capacity: 18,000 lbs. Trailer Weight: 4,600 lbs.
Deck Width: 8 ft. Length: 16 ft. 6 in. Height: 34 in.
Hi Tensile V-50 Steel Mainframe
Cold-Formed Drawbar & Nose Plate

Heavy Duty Jack
Drawbar Storage Area
Fixed "D" Rings
100% Sealed Modular Wiring Harness

SPECIFICATIONS

Frame	Mainrails: W12" x 16 lbs. wide flange I-Beam, one piece cold formed Hi-tensile 50,000 P.S.I. steel mainrails from front to drawbar to rear of trailer
Crossmembers	6" x 3.7 lbs. per ft. I-Beam
Decking	Nominal 2" Hardwood
Headboard	8" high, full width of trailer Drawbar Storage Area
Lights	12 volt, DOT approved
Wiring Harness	USA Star PLUS Sealed Modular Wiring Harness w/ 7-Way ATA Plug
Hitch	One piece solid cast steel (adjustable) lunette eye & flange mount
Safety Chains	Two 3/8" Blue-Krome plated high test, Safety Hook w/ Latch
Parking Jack	12,000 lbs. static / 10,000 lbs. lift (Heavy Duty drop leg screw type)
Tie Down	Two per side (fixed)
Colors	Yellow (Standard), Red, Black w/ matching RPC Undercoating

RUNNING GEAR

Tires	Six 235/85R16 (E)
Hubs/Wheels	Six 8 Stud on 6 1/2" BC Hubs, Six 6.00 x 16 Disc Type Wheels
Suspension	Nylon bushed slipper spring w/ equalizer, capacity 18,000 lbs. tandem
Axles	Three Dexter 6,000 lbs. each
Brakes	Dexter 12" x 2" electric each wheel
Break-away	12 Volt, wet cell battery with integrated battery charging system

OPTIONS

Spare Tire & Disc Wheel 235/85R16 (E) Optional: Spare Tire Carrier
 Tool Box Lid (Lockable) Optional: Expanded Metal Tray Plate
 Traction 2" x 2" Angle 6" C/C Wheel Paths Optional: Traction Center Section, Bucket Pocket or Plate
 Ramps Ladder (standard) Wood (Optional N/C)
 Brake Controller: Cab mounted w/ complete truck wiring harness and receptacle
 Paint (other than standard Yellow) Price on Request