


12 HA-PT Easy Loader Series 12 Ton Tag - (2) 12K ABS Air Brake Axles

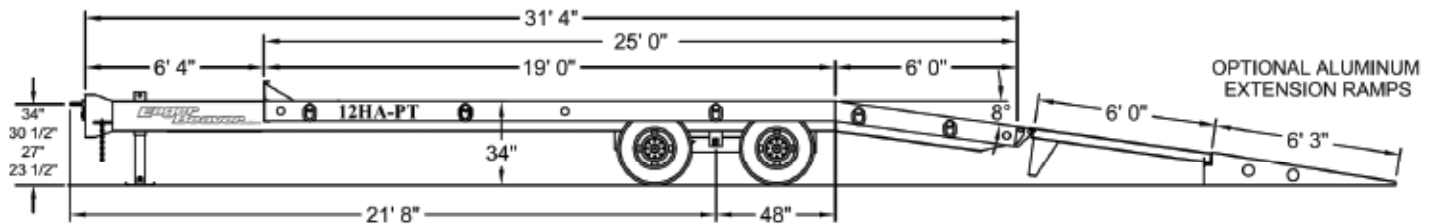

Capacity: 24,000 lbs. Trailer Weight: 6,530 lbs.
Deck Width: 8 ft. 6 in. Length: 19 ft. Height: 34 in.
Hi Tensile V-50 Steel Mainframe
Pierced Crossmembers
Cold-Formed Drawbar & Nose Plate

Heavy Duty Jack
Drawbar Storage Area
8° Beaver Tail (Safe Low Loading Angle)
Patented "ROTO RINGS"® Swivel 360°
100% Sealed Modular Wiring Harness

SPECIFICATIONS

Frame	Mainrails: W12" x 16 lbs. wide flange I-Beam, one piece cold formed Hi-tensile 50,000 P.S.I. steel mainrails from front to drawbar to rear of trailer
Crossmembers	6" x 3.7 lbs. per ft. I-Beam pierced through mainbeam
Decking	Nominal 2" Hardwood
Headboard	8" high, full width of trailer Drawbar Storage Area
Lights	Sealed beam, 12 volt, DOT approved
Wiring Harness	Sealed Lights, USA Star PLUS Sealed Modular Wiring Harness w/ 7-Way ATA Plug
Hitch	One piece solid cast steel (adjustable) lunette eye & flange mount
Safety Chains	Two 3/8" Blue-Krome plated high test, safety hook w/ latch
Parking Jack	12,000 lbs. static / 10,000 lbs. lift (Heavy Duty drop leg screw type)
Tie Down	Five per side - Patented "ROTO RINGS"® Swivel 360°
Colors	Yellow (Standard), Red, Black w/ matching RPC Undercoating

RUNNING GEAR

Tires	Eight 235/85R16 (E) Steel Belted Radial
Hubs/Wheels	Four 8 Stud on 6 1/2" BC (2 pc hub & drum), Eight 6.00 x 16 Disc Type Wheels, Oil seals
Suspension	3" wide rubber bushed Slipper Spring w/ equalizer, capacity 24,000 lbs. tandem (Adj. Alignment)
Axles	Two Heavy Duty Dexter, 12,000 lbs. each
Brakes	Dexter 12 1/4" x 5" Air, "S" Cam, Auto Slack Adjusters
ALL WHEEL ABS	Anti-lock brake system 4S2M, Sensors All Wheels, Two modulator valves
Parking Brake	Spring Brakes on All Wheels

OPTIONS

Additional Deck Length & Width (20'-21'-22'-23'-24' Optional Lengths) (102" Optional Width)
 Additional "ROTO-RINGS"®
 Tool Box Lid (Lockable) Optional: Expanded Metal Tray Plate
 Spare Tire & Disc Wheel 235/85R16 (E) Optional: Spare Tire Carrier
 Traction 2" x 2" Angle 6" C/C Wheel Paths Optional: Traction Center Section, Bucket Pocket or Plate
 Ramps Ladder (standard) Wood (Optional N/C)
 Extension Ramps T-6 Alum. 22" x 75" 8° angle (SET)
 Parking Jack Optional: 2-Speed Jack Optional: Jack mounted on Headboard Optional: 2-Speed Landing Gear is Available
 Apitong Decking in lieu of Oak
 Paint (other than standard Yellow) Price on Request

Call (800) 257-8163 for more information

**Eager
Beaver
Trailers**